

Bluetooth Passive Infrared sensor

GEBC

SPECIFICATION



The ANT-4E-5A-BLE-GE uses PIR motion detector architecture and bluetooth technology for improved detection coverage applications.

OVERVIEW

- PIR sensor.
- Daylight Harvesting
- Bluetooth® NLC.
- High-End Trim, Zoning, Continuous Bi-level Dimming.
- LED Motion indicator.
- Mounting height up to 12 ft .
- 360° coverage pattern.
- Low Voltage connector.
- Technology Partner GEBC.

FEATURES AND BENEFITS


- Bluetooth to 0-10V signal converter, Bluetooth mesh network.
- Built-in 20mA 0-10V signal output.
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices.
- All devices on 0-10V line are broadcast controlled by mobile application.
- In typical outdoor environment, the typical range for wireless communication is 100ft(30m).
- Actual range is dependent on field installation.
- Available with magnetic reset(Touch the side part of sensor for 5 seconds).
- On-board antenna.

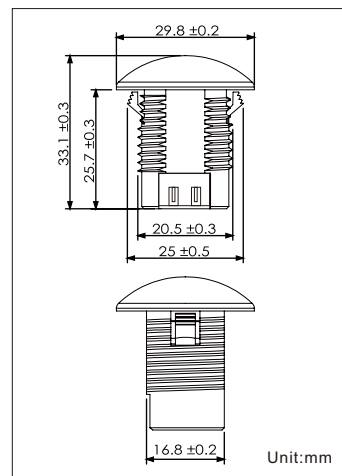


TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	12ft Max.
Detection angle	360°
Operating temperature	-20°C~60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years

COVERAGE PATTERNS

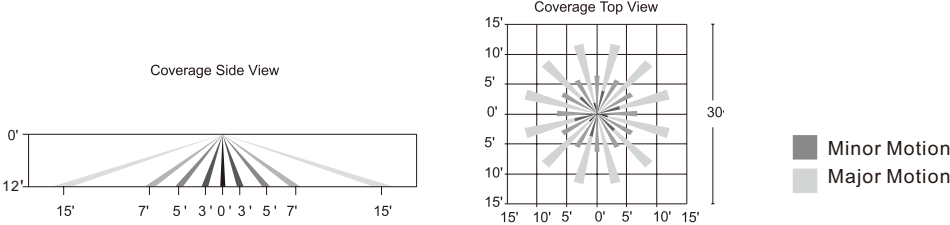

Wiring

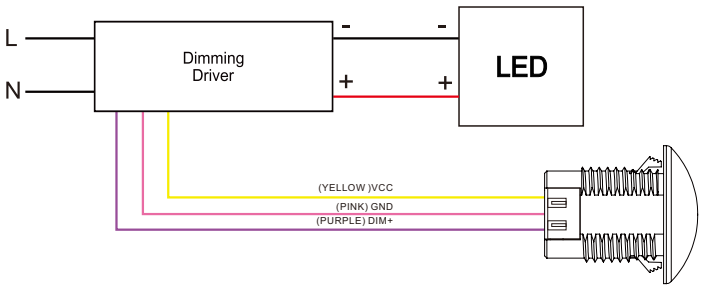

ORDERING INFORMATION

ANT-4E-5A-BLE-GE Bluetooth Passive Infrared sensor