

ANT-4E-4-GE

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134



10-14V 0-10V Fixture-Integrated

Bluetooth PIR Sensor

The ANT-4E-4-GE is passive infrared occupancy bi-level sensor, as a fixture sensor mounts in indoor light fixture and provides daylight harvesting control. It works by 10-14Vdc power, and controls 0-10VDC LED drivers or dimming ballasts, All control parameters are adjustable via a wireless configuration tool capable of storing.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through GEBC app.

GEBC
Bluetooth®

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	12ft Max.
Detection angle	360°
Operating temperature	-20°C~60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

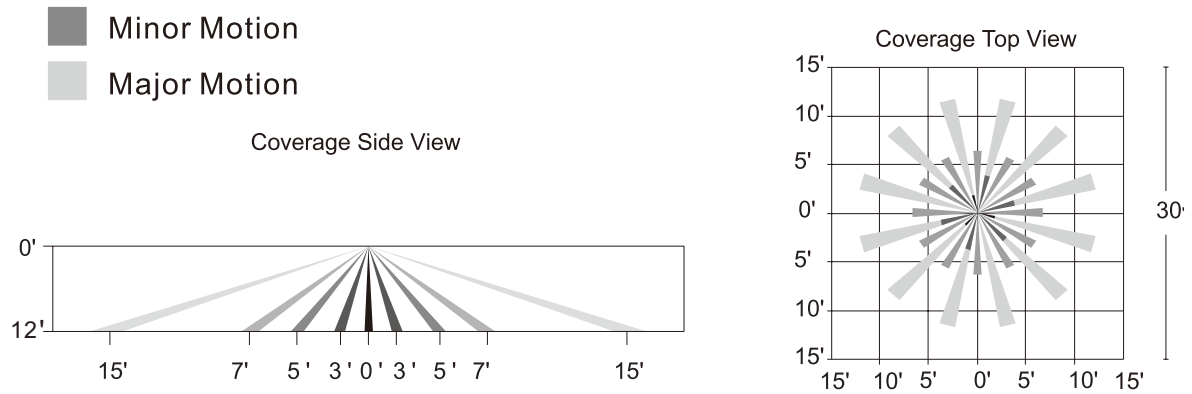

DIMENSIONS AND APPEARANCE

Unit:mm

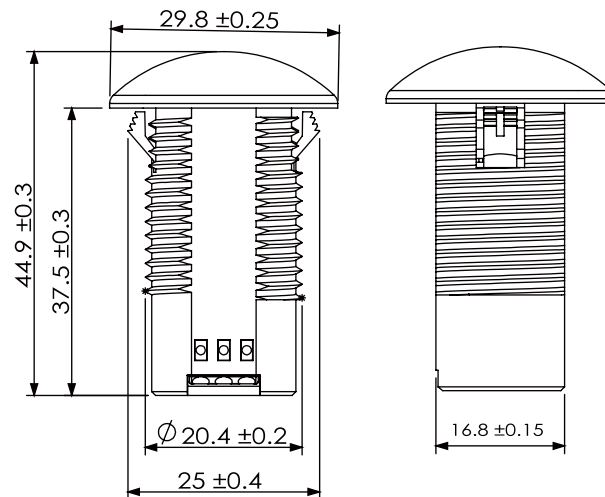

WIRING DIAGRAM

