

ANT-7P-BLE-GE

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134



10-14V 0-10V Bi-level Bluetooth

PIR Sensor with magnets

ANT-7P-BLE-GE uses PIR motion detector architecture technology for improved detection coverage for low bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through GEBC app.

PIR sensor with clips, no need to use screws to fix.

GEBC
Bluetooth®

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	PIR sensor
Input Power	10-14VDC,>50mA
Control Output	0-10V,max 25mA sinking current
Transmission power	<0.2mW
Mounting height	12ft(4m) Max
Detection angle	360°
Operating temperature	-20°C~60°C
IP rating	20
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

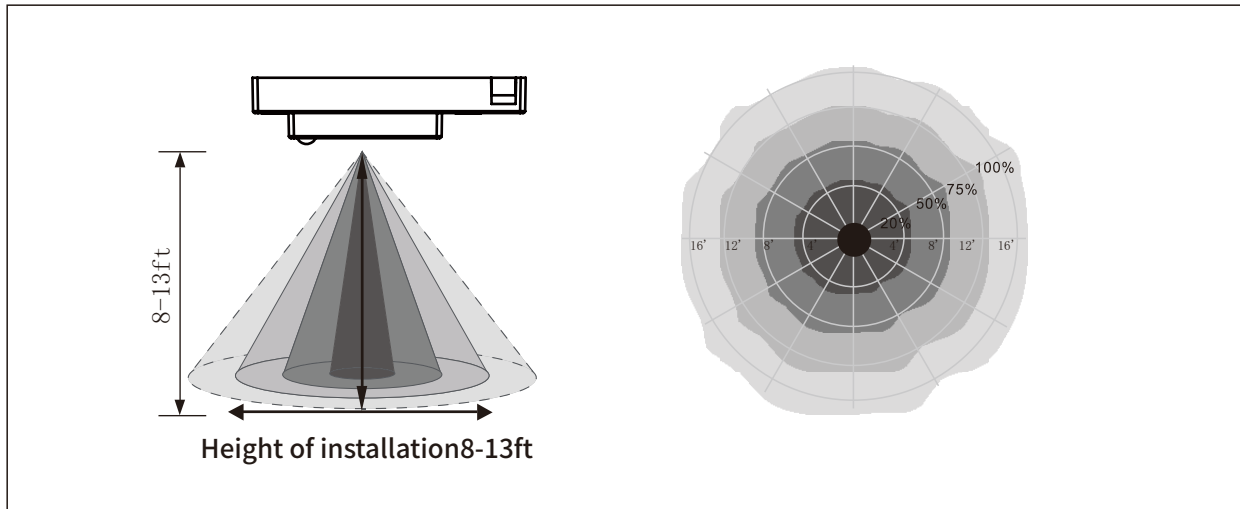

DIMENSIONS AND APPEARANCE

Unit:mm

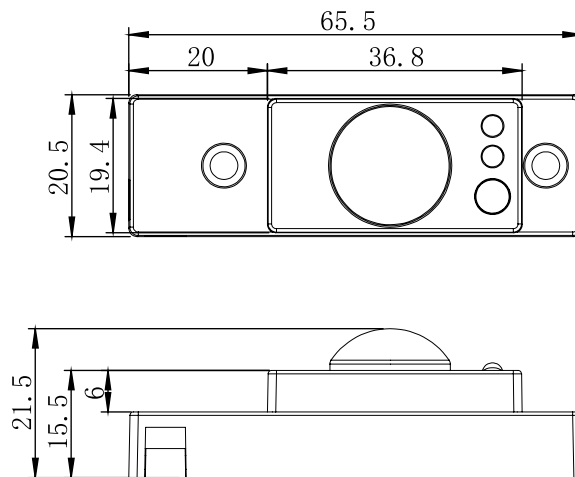

WIRING DIAGRAM

